

Parallel Spring

P08U / P08SU


Stock code: N-P08xU-xxxx-xxxx




Rotary Face	Stationary Face	Elastomer	Build Code [^]
G - Tungsten Carbide	A - Carbon or G - Tungsten Carbide	X - Nitrile (BUNA) or Y - EPDM (EPDM) or Z - Viton (FPM)	L Q R

[^]Build Code R = Right Hand Spring, L = Left Hand Spring, Q = Stationary Only

N-P08U

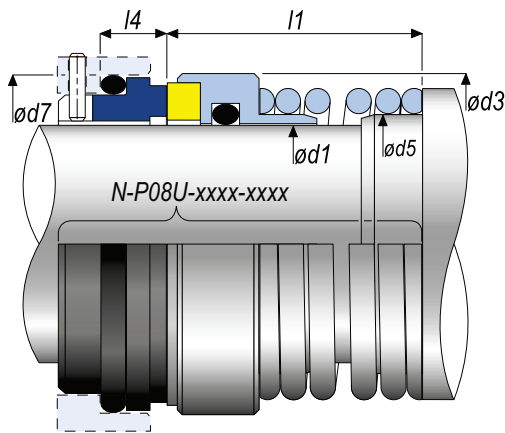

N-P08SU

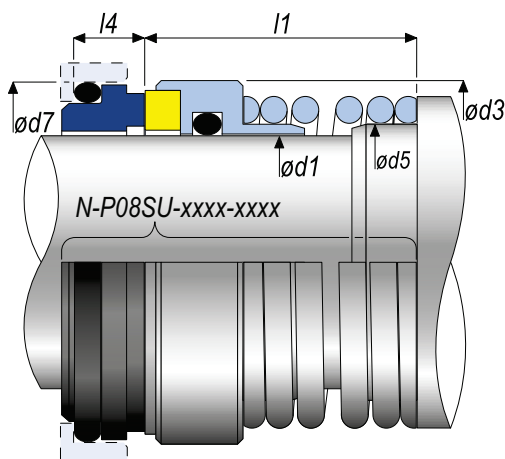

Where a stepped shaft is not present
C02U, C03U or C04U clamp rings can
be used (see pages 25-27 for details)

Size	d1		d3		d5		d7		l1		l4	
	Metric	Inches	Metric	Inches	Metric	Inches	Metric	Inches	Metric	Inches	Metric	Inches
0158	15.8	0.625	29.0	1.142	19.1	0.750	28.6	1.125	24.5	0.965	9.0	0.354
0191	19.1	0.750	32.5	1.280	22.2	0.875	31.7	1.250	24.5	0.965	9.0	0.354
0200	20.0	0.787	34.5	1.358	24.0	0.945	33.3	1.312	27.5	1.083	9.0	0.354
0222	22.2	0.875	34.9	1.378	25.4	1.000	34.9	1.375	26.0	1.024	9.0	0.354
0250	25.0	0.984	38.1	1.500	28.6	1.125	39.9	1.569	30.0	1.181	10.0	0.394
0254	25.4	1.000	38.1	1.500	28.6	1.125	39.9	1.569	30.0	1.181	10.0	0.394
0280	28.0	1.102	42.0	1.654	31.8	1.250	43.1	1.695	31.5	1.240	10.0	0.394
0286	28.6	1.125	42.9	1.687	31.8	1.250	43.1	1.695	31.5	1.240	10.0	0.394
0300	30.0	1.181	45.5	1.791	33.3	1.312	44.6	1.757	31.5	1.240	10.0	0.394
0317	31.7	1.250	46.0	1.811	34.9	1.375	46.3	1.824	34.5	1.358	10.0	0.394
0320	32.0	1.260	47.0	1.850	34.9	1.375	46.3	1.824	34.5	1.358	10.0	0.394
0349	34.9	1.375	49.2	1.937	38.1	1.500	49.5	1.948	37.5	1.476	10.0	0.394
0350	35.0	1.378	50.0	1.969	38.1	1.500	49.5	1.948	37.5	1.476	10.0	0.394
0380	38.0	1.496	53.0	2.087	42.9	1.688	52.6	2.069	37.5	1.476	10.0	0.394
0381	38.1	1.500	52.4	2.063	42.9	1.688	52.6	2.069	37.5	1.476	10.0	0.394
0400	40.0	1.575	55.0	2.165	44.5	1.750	54.3	2.136	37.5	1.476	10.0	0.394
0412	41.2	1.625	55.5	2.185	46.0	1.812	55.8	2.198	37.5	1.476	10.0	0.394
0420	42.0	1.654	55.5	2.185	46.0	1.812	55.8	2.198	37.5	1.476	10.0	0.394
0444	44.4	1.750	58.7	2.313	49.2	1.937	59.0	2.324	37.5	1.476	10.0	0.394
0450	45.0	1.772	60.0	2.362	49.2	1.937	59.0	2.324	37.5	1.476	10.0	0.394
0476	47.6	1.875	61.9	2.437	52.4	2.062	63.7	2.507	42.5	1.673	10.0	0.394
0500	50.0	1.969	66.0	2.598	54.0	2.125	65.4	2.574	45.5	1.791	10.0	0.394
0508	50.8	2.000	66.7	2.625	55.6	2.188	66.9	2.632	45.5	1.791	10.0	0.394
0539	53.9	2.125	69.9	2.750	58.7	2.312	70.0	2.756	47.0	1.850	10.0	0.394
0550	55.0	2.165	71.0	2.795	58.7	2.312	70.0	2.756	47.0	1.850	10.0	0.394
0571	57.1	2.250	73.0	2.875	61.9	2.437	73.2	2.882	47.0	1.850	10.0	0.394
0600	60.0	2.362	77.0	3.031	65.1	2.562	76.4	3.007	50.5	1.988	10.0	0.394
0603	60.3	2.375	76.2	3.000	65.1	2.562	76.4	3.007	50.5	1.988	10.0	0.394
0635	63.5	2.500	79.4	3.125	68.3	2.688	79.6	3.133	50.5	1.988	10.0	0.394
0650	65.0	2.559	82.0	3.228	69.9	2.750	81.2	3.198	53.5	2.106	10.0	0.394
0666	66.6	2.625	82.6	3.250	71.4	2.812	82.7	3.257	53.5	2.106	10.0	0.394
0698	69.8	2.750	85.7	3.375	74.6	2.937	85.9	3.382	53.5	2.106	10.0	0.394
0700	70.0	2.756	87.0	3.425	74.6	2.937	85.9	3.382	53.5	2.106	10.0	0.394
0730	73.0	2.875	90.0	3.543	77.8	3.062	89.1	3.507	56.5	2.224	10.0	0.394
0750	75.0	2.953	91.5	3.602	79.4	3.125	90.8	3.574	56.6	2.228	10.0	0.394
0762	76.2	3.000	95.3	3.750	81.0	3.188	95.4	3.757	63.0	2.480	10.0	0.394
0800	80.0	3.150	99.5	3.917	85.7	3.375	100.3	3.948	63.0	2.480	10.0	0.394
0825	82.5	3.250	101.6	4.000	87.3	3.437	101.8	4.007	63.0	2.480	10.0	0.394
0850	85.0	3.346	105.5	4.154	90.0	3.543	104.7	4.125	63.0	2.480	10.0	0.394
0889	88.9	3.500	108.0	4.250	94.0	3.688	108.1	4.257	63.0	2.480	10.0	0.394
0900	90.0	3.543	110.5	4.350	95.3	3.750	109.8	4.324	68.0	2.677	10.0	0.394
0950	95.0	3.740	115.5	4.547	100.0	3.937	114.3	4.500	68.0	2.677	10.0	0.394
1000	100.0	3.937	120.0	4.724	104.8	4.125	119.3	4.698	68.0	2.677	10.0	0.394
1016	101.6	4.000	124.5	4.902	108.0	4.250	124.0	4.882	72.5	2.854	10.0	0.394
1050	105.0	4.134	128.0	5.039	111.0	4.370	127.0	5.000	72.5	2.854	10.0	0.394
1100	110.0	4.331	133.0	5.236	116.0	4.567	131.7	5.188	72.5	2.854	10.0	0.394
1150	115.0	4.527	137.5	5.413	121.0	4.764	136.5	5.375	72.5	2.854	10.0	0.394

