

Taper Spring


T02U

Stock code: N-T02U-xxxx-xxxx



Rotary Face	Stationary Face	Elastomer	Build Code [^]
B - Alumina Ceramic or E - Stainless Steel	A - Carbon	P - PTFE wrapped Viton or U - FEP or X - Nitrile (BUNA) or Y - EPR (EPDM) or Z - Viton (FPM)	L R

[^]Build Code R = Right Hand Spring, L = Left Hand Spring

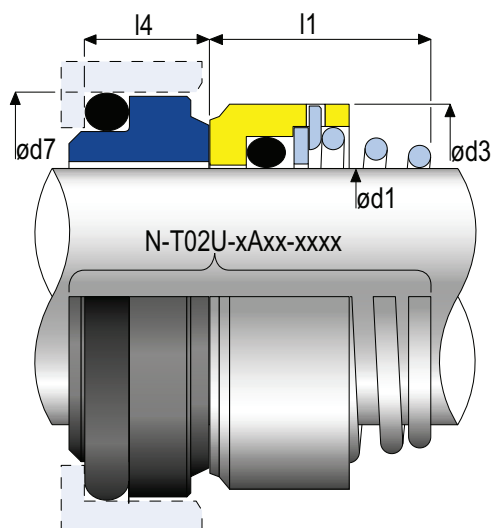


Size	d1		d3		d7		l1		l4	
	Metric	Inches	Metric	Inches	Metric	Inches	Metric	Inches	Metric	Inches
0100	10.0	0.394	20.0	0.787	19.2	0.756	15.5	0.610	7.1	0.279
0120	12.0	0.472	22.0	0.866	21.6	0.850	15.5	0.610	7.6	0.299
0140	14.0	0.551	24.0	0.945	24.6	0.969	15.5	0.610	7.6	0.299
0150	15.0	0.591	25.0	0.984	24.6	0.969	15.5	0.610	8.6	0.339
0160	16.0	0.630	26.0	1.024	28.0	1.102	17.5	0.689	9.0	0.354
0180	18.0	0.709	31.0	1.220	30.0	1.181	18.5	0.728	10.0	0.394
0190	19.0	0.748	32.0	1.260	31.0	1.220	20.0	0.787	9.0	0.354
0200	20.0	0.787	34.0	1.339	35.0	1.378	20.0	0.787	9.5	0.374
0220	22.0	0.866	36.0	1.417	35.0	1.378	21.5	0.846	9.5	0.374
0240	24.0	0.945	38.0	1.496	38.0	1.496	23.0	0.906	9.5	0.374
0250	25.0	0.984	39.0	1.535	38.0	1.496	24.5	0.965	9.5	0.374
0260	26.0	1.024	40.0	1.575	40.0	1.575	24.2	0.955	9.5	0.374
0280	28.0	1.102	42.0	1.654	42.0	1.654	25.5	1.004	10.0	0.394
0300	30.0	1.181	44.0	1.732	45.0	1.772	24.5	0.965	11.0	0.433
0320	32.0	1.260	46.0	1.811	48.0	1.890	28.0	1.102	11.0	0.433
0350	35.0	1.378	49.0	1.929	52.0	2.047	28.0	1.102	11.5	0.453
0380	38.0	1.496	54.0	2.126	55.0	2.165	31.0	1.220	11.5	0.453
0400	40.0	1.575	56.0	2.205	58.0	2.283	34.0	1.339	11.5	0.453
0420	42.0	1.654	59.0	2.323	62.0	2.441	35.0	1.378	14.3	0.563
0430	43.0	1.693	59.0	2.323	62.0	2.441	35.4	1.394	13.9	0.547
0450	45.0	1.772	61.0	2.402	64.0	2.520	36.5	1.437	14.3	0.563
0480	48.0	1.890	64.0	2.520	68.4	2.693	42.0	1.654	14.3	0.563
0500	50.0	1.969	66.0	2.598	69.3	2.728	43.4	1.707	13.9	0.549
0550	55.0	2.165	71.0	2.795	75.4	2.969	47.0	1.850	15.3	0.602
0580	58.0	2.283	78.0	3.071	78.4	3.087	50.0	1.969	15.3	0.602
0600	60.0	2.362	79.0	3.110	80.4	3.165	51.0	2.008	15.3	0.602
0650	65.0	2.559	85.0	3.346	85.4	3.362	52.0	2.047	15.3	0.602
0680	68.0	2.677	88.0	3.465	91.5	3.602	53.0	2.087	16.0	0.630
0700	70.0	2.756	90.0	3.543	92.0	3.622	54.0	2.126	15.3	0.602
0750	75.0	2.953	98.0	3.858	99.0	3.898	55.0	2.165	15.3	0.602
0800	80.0	3.150	103.0	4.055	104.0	4.094	58.0	2.283	16.3	0.642



T02LFU



Stock code: F-T02LFU-xxxx-xxxx



Rotary Face	Stationary Face	Elastomer	Build Code [^]
B - Alumina Ceramic or E - Stainless Steel	A - Carbon	X - Nitrile (BUNA) or Y - EPR (EPDM) or Z - Viton (FPM)	L R

[^]Build Code R = Right Hand Spring, L = Left Hand Spring

Size	d1		d3		d7		l1		l4	
	Metric	Inches	Metric	Inches	Metric	Inches	Metric	Inches	Metric	Inches
0300	30.0	1.181	44.0	1.732	45.0	1.772	31.5	1.240	11.0	0.433
0400	40.0	1.575	56.0	2.205	58.0	2.283	33.5	1.319	11.5	0.453
0500	50.0	1.969	66.0	2.598	70.0	2.756	33.5	1.319	14.0	0.551

