

# Taper Spring

T03U



Stock code: N-T03U-XXXX-XXXX



Rotary Face	Stationary Face	Elastomer	Build Code
A - Carbon or B - Alumina Ceramic or D - Silicon Carbide (RB) or E - Stainless Steel or G - Tungsten Carbide* or J - Sintered SIC	A - Carbon or B - Alumina Ceramic or D - Silicon Carbide (RB) or G - Tungsten Carbide* or J - Sintered SIC	X - Nitrile (BUNA) or Y - EPDM (EPDM) or Z - Viton (FPM)	L R

\*Availability subject to order quantity

^Build Code R = Right Hand Spring, L = Left Hand Spring

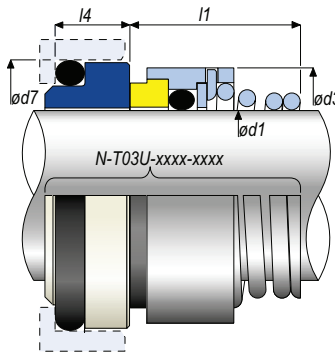

Size	d1		d3		d7		l1		l4	
	Metric	Inches	Metric	Inches	Metric	Inches	Metric	Inches	Metric	Inches
0100	10.0	0.394	20.0	0.787	18.1	0.713	15.0	0.591	5.5	0.217
0110	11.0	0.433	21.0	0.827	20.6	0.811	18.0	0.709	5.5	0.217
0120	12.0	0.472	22.0	0.866	20.6	0.811	18.0	0.709	5.5	0.217
0130	13.0	0.512	23.0	0.906	23.1	0.909	22.0	0.866	6.0	0.236
0140	14.0	0.551	24.0	0.945	23.1	0.909	22.0	0.866	6.0	0.236
0150	15.0	0.591	25.0	0.984	26.9	1.059	22.0	0.866	7.0	0.276
0160	16.0	0.630	26.0	1.024	26.9	1.059	23.0	0.906	7.0	0.276
0180	18.0	0.709	31.0	1.220	30.9	1.217	24.0	0.945	8.0	0.315
0190	19.0	0.748	32.0	1.260	30.9	1.217	25.0	0.984	8.0	0.315
0200	20.0	0.787	34.0	1.339	30.9	1.217	25.0	0.984	8.0	0.315
0220	22.0	0.866	36.0	1.417	35.4	1.394	25.0	0.984	8.0	0.315
0230	23.0	0.906	37.0	1.457	35.4	1.394	27.0	1.063	8.0	0.315
0240	24.0	0.945	38.0	1.496	35.4	1.394	27.0	1.063	8.0	0.315
0250	25.0	0.984	39.0	1.539	38.2	1.504	27.0	1.063	8.5	0.335
0280	28.0	1.102	42.0	1.654	43.3	1.705	29.0	1.142	9.0	0.354
0300	30.0	1.181	44.0	1.732	43.3	1.705	30.0	1.181	9.0	0.354
0320	32.0	1.260	46.0	1.811	43.3	1.705	30.0	1.181	9.0	0.354
0330	33.0	1.299	47.0	1.850	53.5	2.106	39.0	1.535	11.5	0.453
0350	35.0	1.378	49.0	1.929	53.5	2.106	39.0	1.535	11.5	0.453
0380	38.0	1.496	54.0	2.126	60.5	2.382	39.0	1.535	11.5	0.453
0380-B	38.0	1.496	54.0	2.126	53.5	2.106	39.0	1.535	10.0	0.394
0400	40.0	1.575	56.0	2.205	60.5	2.382	39.0	1.535	11.5	0.453
0420	42.0	1.654	59.0	2.323	60.5	2.382	39.0	1.535	11.5	0.453
0430	43.0	1.693	59.0	2.323	60.5	2.382	39.0	1.535	11.5	0.453
0440	44.0	1.732	61.0	2.402	65.5	2.579	41.0	1.614	11.5	0.453
0450	45.0	1.772	61.0	2.402	65.5	2.579	41.0	1.614	11.5	0.453
0480	48.0	1.890	64.0	2.520	65.5	2.579	41.0	1.614	11.5	0.453
0500	50.0	1.969	66.0	2.598	72.5	2.854	45.0	1.772	11.5	0.453
0550	55.0	2.165	71.0	2.795	72.5	2.854	47.0	1.850	11.5	0.453
0600	60.0	2.362	79.0	3.110	79.3	3.125	49.0	1.929	11.5	0.453
0650	65.0	2.559	85.0	3.346	84.5	3.327	51.0	2.008	11.5	0.453
0700	70.0	2.756	90.0	3.543	89.5	3.524	51.0	2.008	11.5	0.453
0750	75.0	2.953	98.0	3.858	94.5	3.720	57.0	2.244	11.5	0.453
0800	80.0	3.150	103.0	4.055	99.5	3.917	59.0	2.323	11.5	0.453
0850	85.0	3.346	107.5	4.232	105.5	4.154	59.0	2.323	13.5	0.531
0900	90.0	3.543	111.0	4.370	111.5	4.390	62.0	2.441	13.5	0.531
0950	95.0	3.740	119.0	4.685	116.5	4.587	62.0	2.441	13.5	0.531
1000	100.0	3.937	124.0	4.882	119.5	4.705	75.0	2.953	13.5	0.531

