



# Double Super Torque

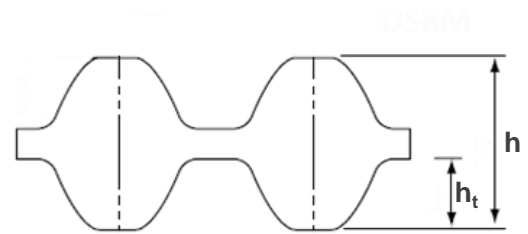

## Product Information

This rubber timing belt with STPD tooth-profile smoothly engages the round tooth shape. Our SUPER TORQUE have a variety of tooth pitch and size variations available. This belt is versatile and has an excellent product availability.

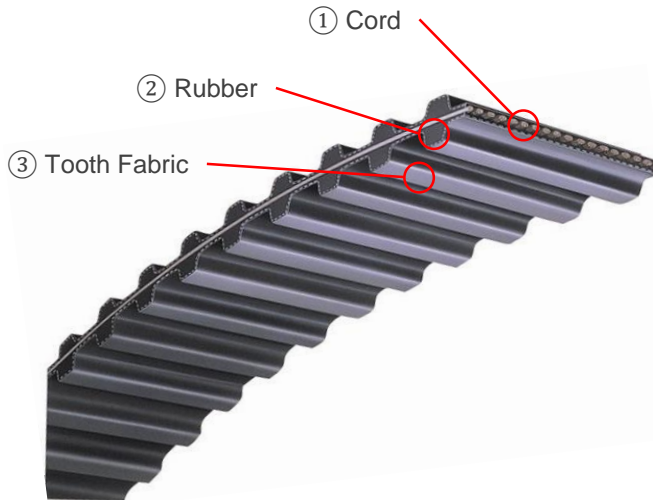

	DS3M	DS5M	DS8M	DS14M
Belt type	Rubber timing belt			
Tooth height $h_t$ [mm]	1.14	1.91	3.05	5.30
Belt thickness $h$ [mm]	3.04	4.78	7.47	13.39
① Tooth fabric	Nylon			
② Cord	Glass fiber			
③ Rubber	CR			
Heat resistance temperature [°C]	+80			
Cold resistance temperature [°C]	-30			
Max. belt speed [m/s]	30			
Wear resistance	Normal			
Electric conductivity	Yes			

## Product Code

### D3500S2M1062

D: Double sided    3500: Width (mm x10)    S2M: Tooth profile    1062: Belt length (mm)