



HTD - Single & Double

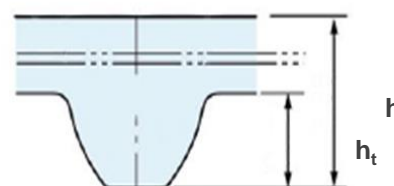

Product Information

Our HTD timing belts provide a high-power transmission capacity. These belts can be used as an alternative for chains and gears, offering the additional advantages of cost-efficiency, quiet operation, and a long operation life span.

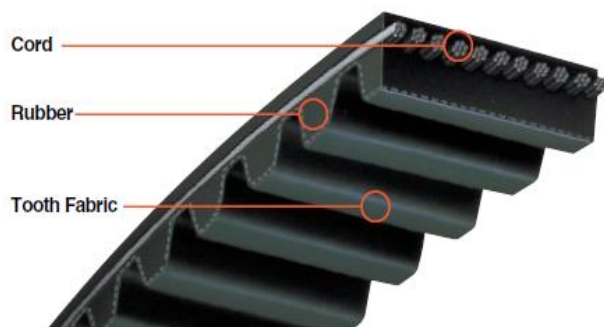

	H5M	H8M	DH8M	H14M
Belt type	Rubber timing belt			
Tooth height h_t [mm]	2.08	3.57	3.57	6.28
Belt thickness h [mm]	3.80	6.20	8.34	10.13
① Tooth fabric	Nylon			
② Cord	Glass fiber			
③ Rubber	CR			
Heat resistance temperature [°C]	+90			
Cold resistance temperature [°C]	-30			
Max. belt speed [m/s]	30			
Wear resistance	Good			
Electric conductivity	Yes			

Product Code

(D)2400H8M40

D: Double sided 2400: Belt length (mm) H8M: Tooth profile 40: Belt width (mm)