



Mega Torque EX

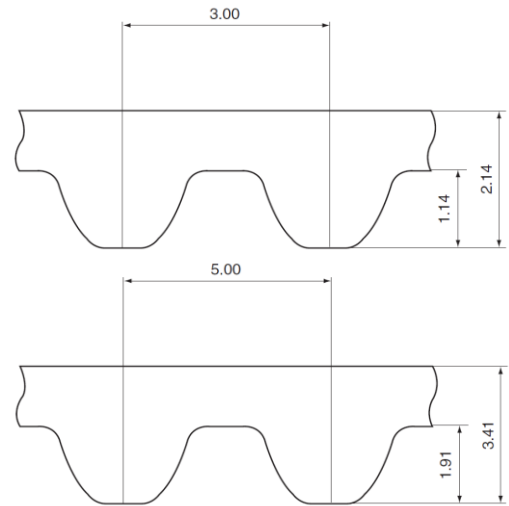

Product Information

Our MEGAT TORQUE EX timing belt is required for precision machinery and similar applications, that are frequently starting and stopping. This high grade belt is suited for conditions where high position accuracy and damping properties are necessary.

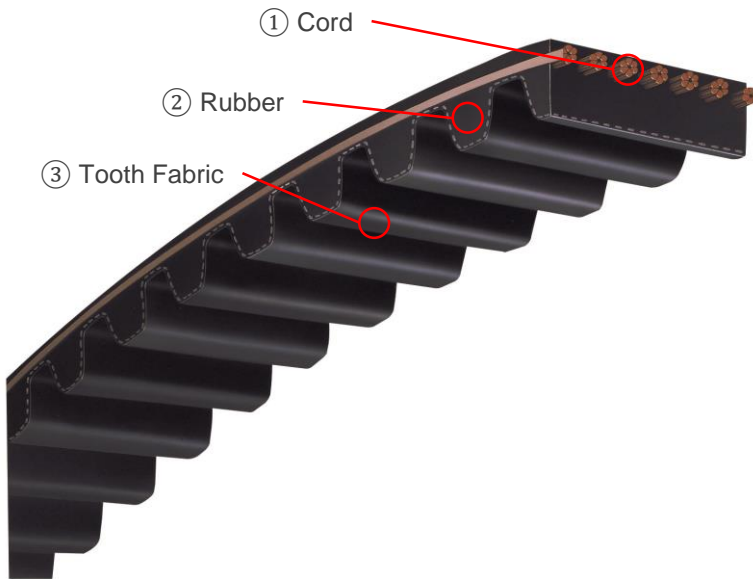

	MTS3M	MTS5M
Belt type	Rubber timing belt	
Tooth height h_t [mm]	1.14	1.91
Belt thickness h [mm]	2.14	3.41
① Tooth fabric	Nylon	
② Cord	Carbon fiber	
③ Rubber	H-NBR	
Heat resistance temperature [°C]	+110	
Cold resistance temperature [°C]	-30	
Max. belt speed [m/s]	30	
Wear resistance	Good	
Electric conductivity	Yes	

Product Code

100MTS5M350 EX

100: Width (mm x10) MT: Mega Torque S5M: Tooth profile

720: Length (mm) EX: Specification