



# MEGA TORQUE G2

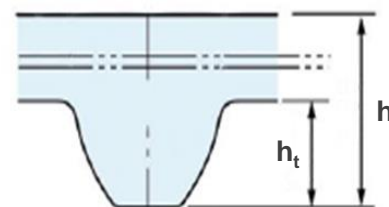

## Product Information

Our MEGA TORQUE G2 has compared to our SUPER TORQUE enhanced power transmission capabilities, which allows a compact layout due to narrow width of belt and pulley.

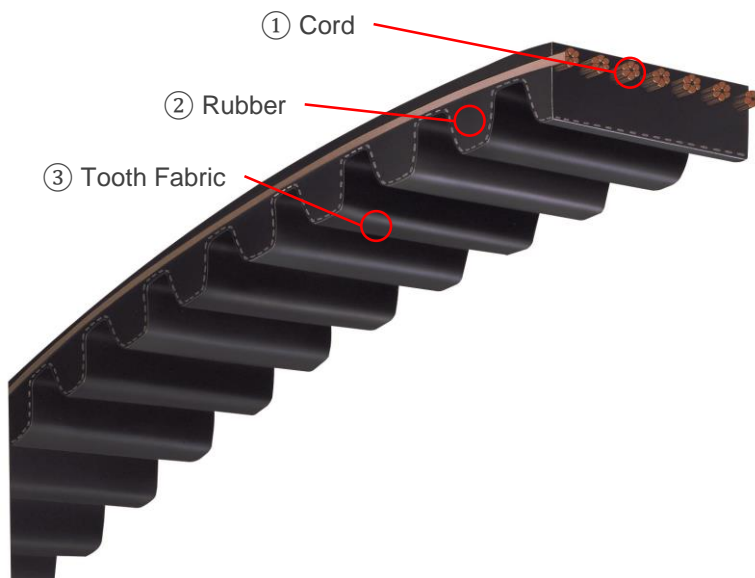

	MTS8M	MTS14M
Belt type	Rubber Timing Belt	
Tooth height $h_t$ [mm]	3.05	5.30
Belt thickness $h$ [mm]	5.3	10.2
① Tooth fabric	Nylon	Special Nylon
② Cord	Carbon Fiber	High Modulus Glass Fiber
③ Rubber	H-NBR	
Heat resistance temperature [°C]	+110	
Cold resistance temperature [°C]	-30	
Max. belt speed [m/s]	30	
Wear resistance	Normal	
Electric conductivity	Yes	

## Product Code

### 2500MTS8M1225 G2

2500: Belt width (mmx10)	MT: Quality	S8M: Tooth profile
1225: Belt length (mm)	G2: Specification	