
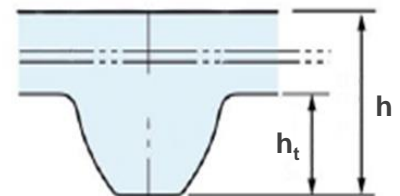


Product Information

This rubber timing belt with STPD tooth-profile smoothly engages the round tooth shape. Our SUPER TORQUE have a variety of tooth pitch and size variations available. This belt is versatile and has an excellent product availability.

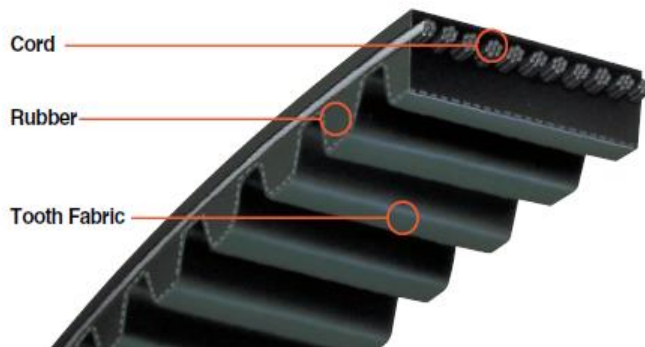

	S2M	S3M	S5M	S8M	S14M
Belt type	Rubber Timing Belt				
Tooth height h_t [mm]	0.76	1.14	1.91	3.05	5.30
Belt thickness h [mm]	1.36	1.94	3.41	5.3	10.2
① Tooth fabric	Nylon				
② Cord	Glass Fiber				
③ Rubber	CR				
Heat resistance temperature [°C]	+80				
Cold resistance temperature [°C]	-30				
Max. belt speed [m/s]	30				
Wear resistance	Normal				
Electric conductivity	Yes				

Product Code

3500S2M1062

3500: Belt width (mmx10)

S2M: Tooth profile

1062: Belt length (mm)