


# SUPERTORQUE U



## Product Information

Polyurethane timing belts smoothly engage the round tooth shape. It has a variety of tooth pitch and size variations available, versatile and excellent product availability.

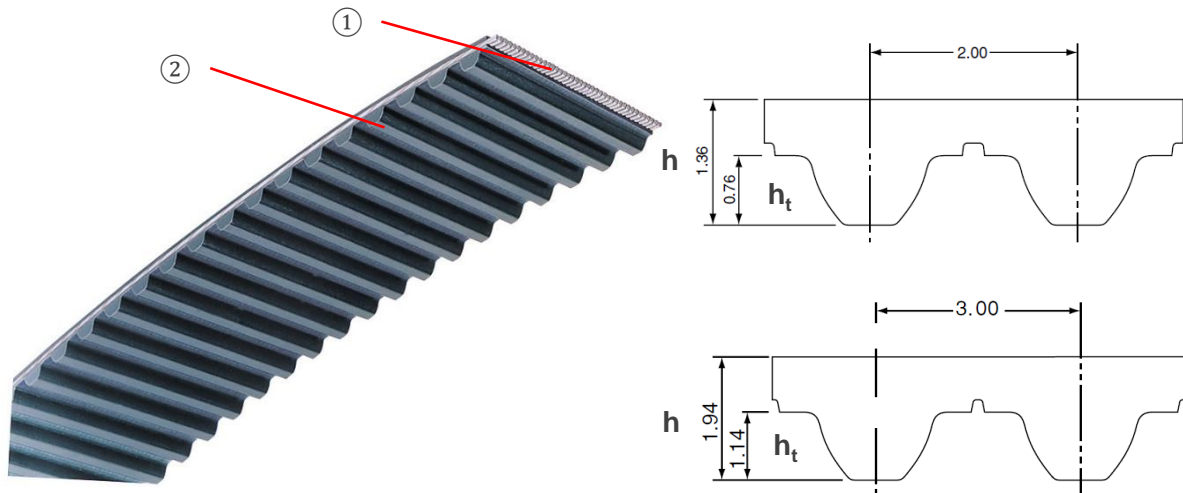

	S2M	S3M
Belt type	Polyurethane Timing Belt	
Tooth height $h_t$ [mm]	0.76	1.14
Belt thickness $h$ [mm]	1.36	1.94
① Cord	Polyester/Aramid	
② Material	Polyurethane	
Heat resistance temperature [°C]	+80	
Cold resistance temperature [°C]	-20	
Max. belt speed [m/s]	25	
Wear resistance	Normal	
Electric conductivity	Yes	

## Product Code

### 60S3M201 U

60: Belt width (mmx10)      S3M: Tooth profile      201: Belt length (mm)

U: Polyurethane