



# XH & XXH Timing Belt

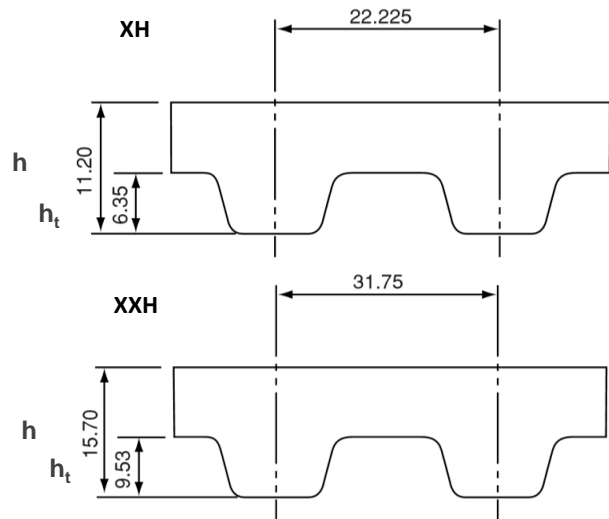

## Product Information

Our standard rubber and polyurethane timing belts follow JIS and ISO standard. There is a variety of tooth profiles and size variations available with a wide product availability.

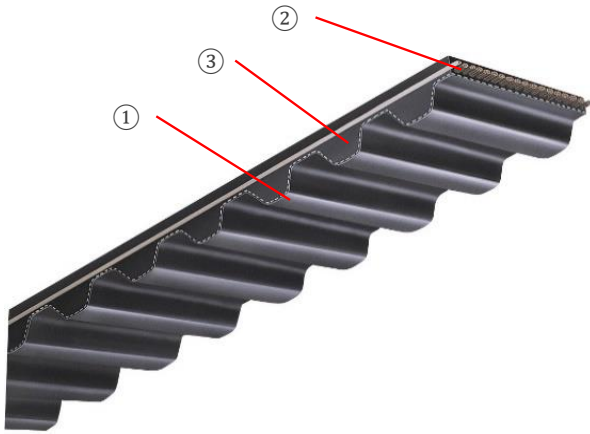

	XH	XXH
Belt type	Rubber timing belt	
Tooth height $h_t$ [mm]	6.35	9.53
Belt thickness $h$ [mm]	11.20	15.70
① Tooth fabric	Nylon	
② Cord	Glass fiber	
③ Rubber	CR	
Heat resistance temperature [°C]	90	
Cold resistance temperature [°C]	-30	
Max. belt speed [m/s]	30	
Wear resistance	Good	
Electric conductivity	Yes	

## Product Code

# 1120XH1500

1120: Belt length (inch x10)      XH: Tooth profile      1500: Width (inch x100)